Engine

Turbo diesel intercooler Deutz TCD 2013 LO4 2V 173 H.P. •water cooled 4 cylinders in-line engine

• option to Turbo diesel intercooler Deutz TCD 2012 L06 2V 208 H.P. water cooled 6 cylinders in-line engine .

Mixing

Overlapping 2 mixing augers with variable hydrostatic Sauer pump and motor with 2 speeds mixing connecting axial to gearbox.

Chopper

Spiral facer with Variable hydrostatic Sauer pump with Cut -Off - Pressure and Reverse.


Driving

Front and Rear Drive axles - 4WD with Sauer variable hydrostatic pump 2 speeds up to 25Kph OR option to 40Kph .


Steering

4 wheels steering in farm mode and 2 wheels steering in road mode.



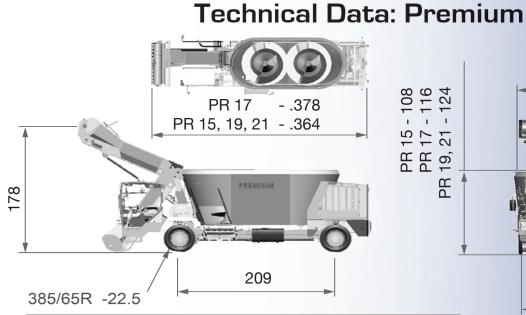

Volume M ³	Net weight K"g	Max Load K"g	Max gross weight K"g
15	12700	8500	21200
17	13200	8500	21700
19	14700	8500	23200
21	14900	8500	23400







Email : sales@lachish.com www.**rmhmixer**.com



Mike Brady Jones Equipment Co.

12667 Massey Rd. Massey, MD. 21650

Office: 800-801-2082; Cell: 609-314-2228 Email: mike@jonesdairy.com web: www.rmhjonesequipment.com

remium THE CUTTING EDGE TECHNOLOGY



Maneuverable & Narrow

Long Lasting



Feed all herd groups with One Machine

The Premium is a mechnical self propelled mixer with 2 overlapping mixing augers designed mainly for narrow & low dairy farms with medium size farms.

Efficient chopping preserving the nutritional value.





Quick, efficient, precise & homogenous mixing preserving the nutrition value.

User friendly & safe machine

30 Year innovation of self propelled